

ATG 114/670 HEAVY DUTY BOLLARD

Operation Type: Telescopic & Fixed



ATG ACCESS



CERTIFICATION

Manufactured to the BSI: ISO 9001 quality standard. Tested to the Sold Secure, security standard and insurance company approved.

FINISHES

Supplied hot dip galvanised as standard with two yellow reflective bands. This range can also be nylon coated to any specified RAL colour or supplied in stainless steel.

OPTIONAL EXTRAS

Sold Secure lock – high security lock; folding stainless steel handle (not in conjunction with the sold secure lock).

PRODUCT OVERVIEW

The ATG 114/670 heavy duty bollard range includes a fully telescopic model and a fixed variant. With an increased diameter this product offers an aesthetically pleasing, more imposing deterrent to unauthorised vehicles or ram-raid attacks.

TELESCOPIC BOLLARD:

To operate you simply turn the key in the lock, twist the handle and lower gently into the outer casing.

The lid can then be closed, and vehicle access is possible. To secure and restrict vehicle access again you lift the lid, hold the handle, lift the product into the 'up' position, rotate the handle then push the lock down with your thumb. This bollard is supplied with a lift-assist mechanism as standard which enables the product to provide heavy duty, robust security which can be utilised by all as the mechanism reduces the lifting weight by up to 60%.


FIXED BOLLARD:

ATG can supply matching static bollards if required to provide a complete perimeter security solution.

Static bollards can be used to segregate pedestrian and protect shop fronts and ATM's from ram-raid attacks.

Fixed bollards are supplied with an overall length of 1,300 mm meaning that clients can install the product to a height above ground which suits the sites requirements.

All ATG Access bollards are UK manufactured to the BSI quality standard ISO 9001.

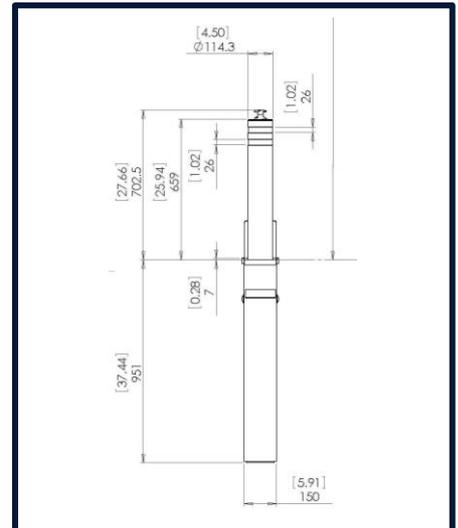

ATG 114/670 ROUND SECURITY BOLLARD RANGE

	Telescopic Variant	Fixed Variant
Bollard Diameter (mm)	114 mm	114 mm
Height Above Ground (mm)	697 mm (Inc. 'T' Bar Handle)	To client's requirements: Supplied in an overall length 1,300 mm
Foundation Depth (mm)	1,050 mm	Supplied in an overall length 1,300 mm
Finishes Available	Hot dip galvanised as standard.	Hot dip galvanised as standard.
Lifting Weight (kg)	6-7 kg	N/A
Wall Thickness (mm)	5 mm (Galv. or RAL) 6 mm (Stainless Steel)	5 mm (Galv. or RAL) 6 mm (Stainless Steel)
Optional Extras	Sold Secure Lock Stainless Steel Folding Handle	N/A