

ATG 168/900 SECURITY BOLLARD

Operation Type: Telescopic & Fixed



ATG ACCESS



CERTIFICATION

Manufactured to the BSI: ISO 9001 quality standard. Tested to the Sold Secure, security standard and insurance company approved.

FINISHES

Supplied hot dip galvanised as standard with two yellow reflective bands. This range can also be nylon coated to any specified RAL colour or supplied in stainless steel.

OPTIONAL EXTRAS

Sold Secure lock, available in Grade 316 stainless steel if required. A variety of RAL colours available.

PRODUCT OVERVIEW

The 168/900 security bollard range includes a static and fully telescopic model. With an increased diameter and height, this product offers an aesthetically pleasing, more imposing deterrent to unauthorised vehicles or ram-raid attacks.

TELESCOPIC BOLLARD

To operate you simply turn the key in the lock, twist the handle and lower gently into the outer casing.

The lid can then be closed, and vehicle access is possible. To secure and restrict vehicle access again you lift the lid, hold the handle, lift the product into the 'up' position and then push the lock down with your thumb. This bollard is supplied with a lift-assist mechanism as standard which enables the product to provide heavy duty, robust security which can be utilised by all as the mechanism

reduces the lifting weight by up to 60%.


FIXED BOLLARD

ATG Access can supply matching static bollards if required to provide a complete perimeter security solution.

Static bollards can be used to segregate pedestrian and protect shop fronts and ATM's from ram-raid attacks.

Supplied in an overall length of 1,300 mm; static bollards can be installed to suit your required height above ground.

All ATG Access bollards are UK manufactured to the BSI quality standard ISO 9001.

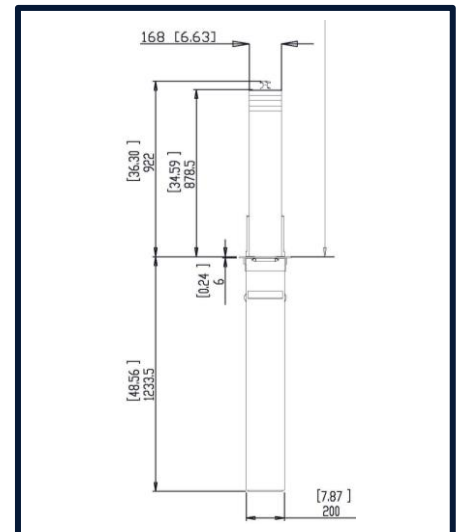

ATG 168/900 ROUND SECURITY BOLLARD RANGE

	Telescopic Variant	Fixed Variant
Bollard Diameter (mm)	168 mm	168 mm
Height Above Ground (mm)	922 mm (Inc. 'T' Bar Handle)	To client's requirements: Supplied in an overall length 1,300 mm
Foundation Depth (mm)	1,234 mm	Supplied in an overall length 1,300 mm
Finishes Available	Hot dip galvanised as standard with two yellow reflective bands	Hot dip galvanised as standard with two yellow reflective bands.
Lifting Weight (kg)	9-10 kg	N/A
Wall Thickness (mm)	5 mm (Galv. or RAL) 6 mm (Stainless Steel)	5 mm (Galv. or RAL) 6 mm (Stainless Steel)
Optional Extras	Sold Secure Lock Variety of Aesthetic Finishes	Can be supplied without banding and with alternative shaped tops if required (sloping, domed or flat).